



Start Charged. Stay Charged.

Package Contents

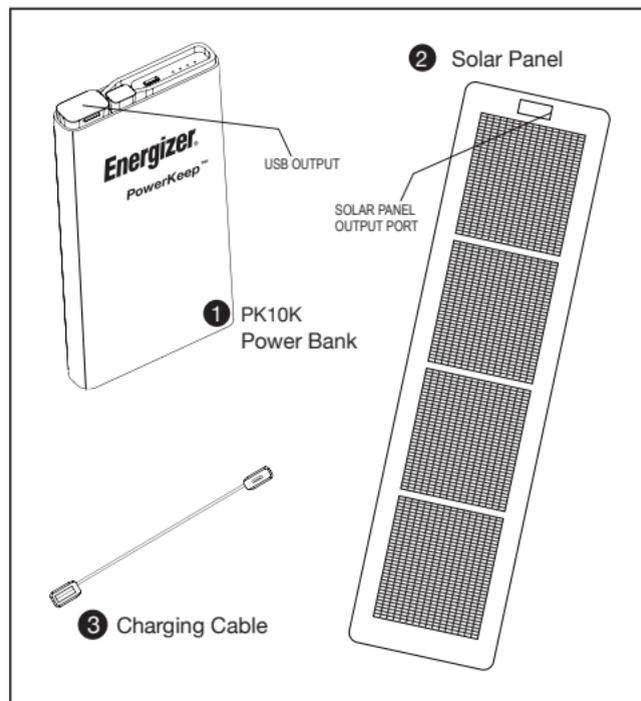


Product Includes:
PK10K power bank, solar panel and micro-USB cable

Start Charged

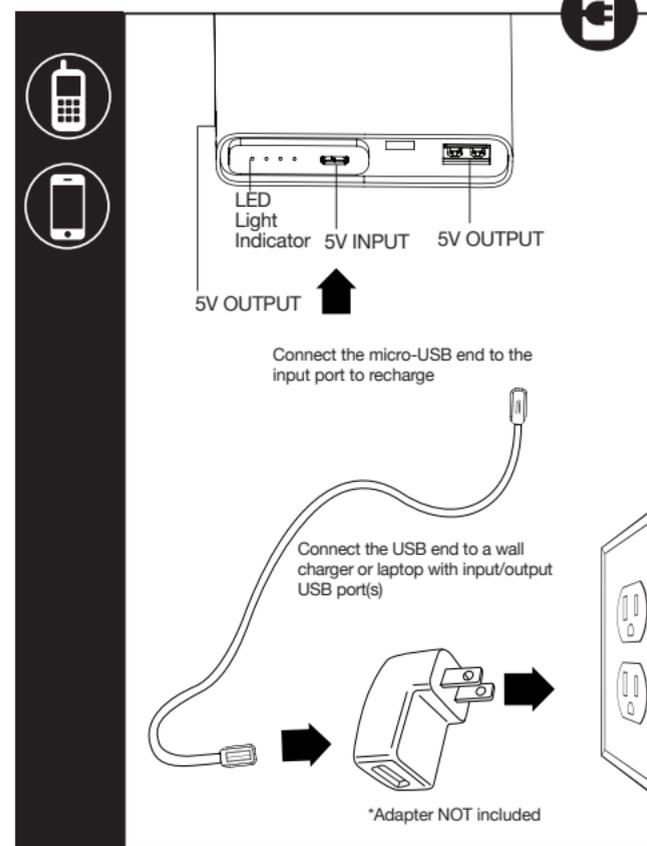

Stay Charged

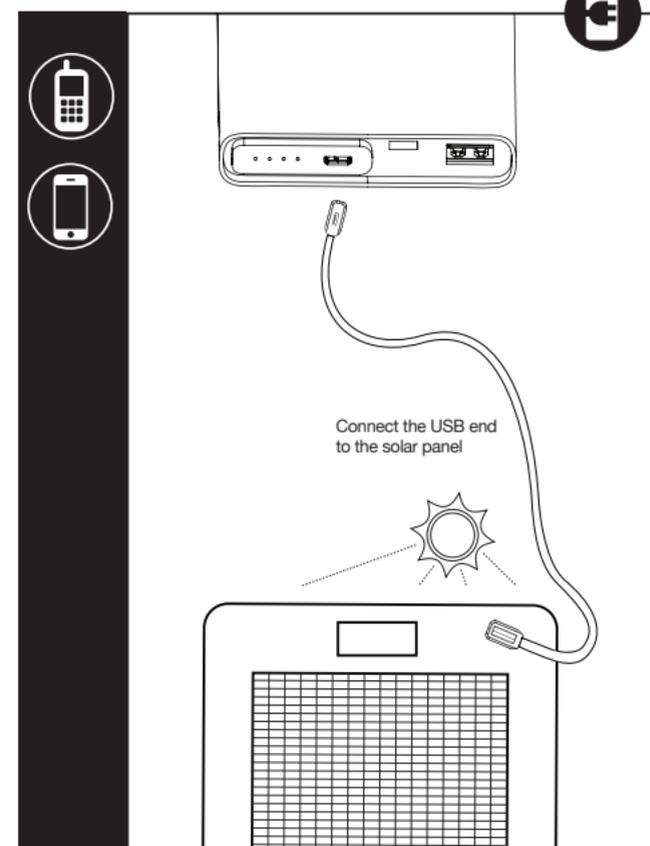

How to charge the PK10K power bank

The PK10K can be charged three ways: by the PowerKeep portable solar panel, a USB charging port or a wall outlet. No matter which way you choose, the steps are the same.

- I). Use the micro-USB cable to connect the PK10K input port to a charging port, a wall outlet or to the output port of the solar panel. When charging the PK10K from the wall, you will use the same wall transformer that came with your device (i.e. smartphone). We don't include a wall transformer because most devices already come with them.
- II). During charging, the LED power indicators will blink. A blinking light indicates charging and a solid light indicates fully charged.
- III). Once charged, four (4) solid LED lights will indicate the PK10K is fully charged.


How to charge your USB device, such as a smartphone, with the PK10K:

Use the charging cable for your smartphone or USB device and connect the device to either output port on the PK10K.

How to charge your USB device, such as a smartphone, with the PowerKeep solar panel:

Use the charging cable for your smartphone or USB device and connect the device to the output port on the back of the solar panel.

How to Tell Level of Charge

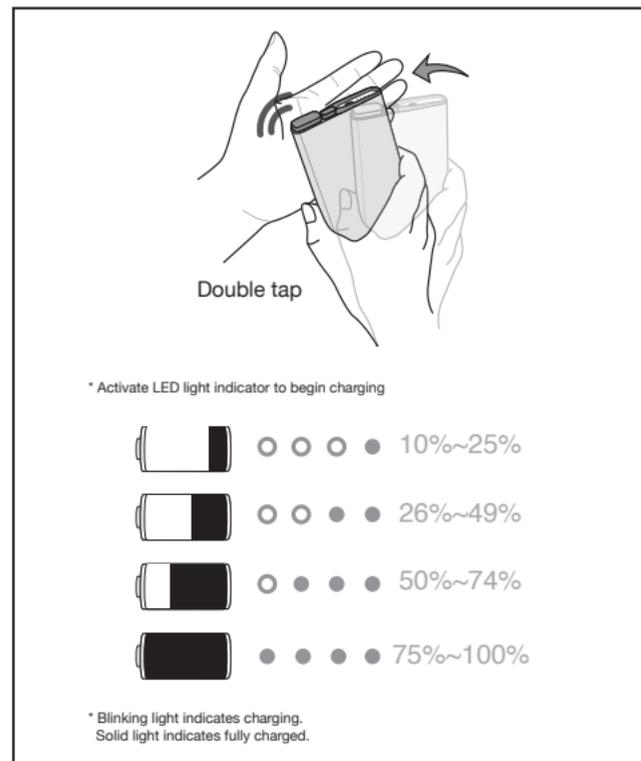

We recommend charging your PK10K power bank before you leave home. Then, when you are on the go, use the PowerKeep™ solar panels, a USB charging port or a wall outlet to recharge the PK10K.

Important Notes

1. Once the PK10K is fully charged, your power bank automatically shuts off to save power.
2. During charge and recharge, your PK10K may feel slightly warm, this is normal, do not worry.
3. Fully charge the PK10K before first use to maximize the battery life.

For the most up-to-date FAQs, please visit:
www.energizersolar.com/faqs

Product Dimensions

PK10K power bank (LxWxH): 147 x 76 x 15 mm (5.78 x 2.9 x 0.59 in)
Solar panel open (LxWxH): 774 x 185 x 2 mm (30.5 x 7.3 x 0.08 in)
Solar panel folded (LxWxH): 225 x 186 x 18 mm (8.8 x 7.3 x 0.71 in)

Weight

PK10K power bank: 240 g (0.53 lb)
Solar panel: 293 g (0.65 lb)

Solar Panel

Solar power: 6W regulated
Output: 5V/1.2A
Color: Black

PK10K Power Bank:

Battery capacity: 3.7V/10000mAh; 37Wh
Battery cell type: Lithium Polymer
Input/recharge port: 5V/2.0A, micro-USB
Output ports: Dual 5V/2A per port, 2.4A combined, USB-A
Regulatory certifications: FCC, CE
Color: Black
USB charge: PK10K is fully charged in 6.7 hours @ 2A
Solar charge: PK10K is fully charged in 10-20 hours*
Time to charge smartphone from PK10K (avg): 2.5 hours**
Time to charge tablet from PK10K (avg): 4 hours**
Smartphone recharge(s) (avg): 4**
Tablet recharge(s) (avg): 1*
*Solar charge time is dependent on angle and intensity of the sun.
**Results vary depending on model and device type.

Warranty: Read the complete Limited Warranty at energizersolar.com/returns-warranty-information/

Support:

Telephone: 1-888-404-9010
Email: support@energizersolar.com
Website: energizersolar.com



© 2017 Energizer. Energizer and certain graphic designs are trademarks of Energizer Brands, LLC and related subsidiaries and are used under license by PTGHS, LLC. All other brand names are trademarks of their respective owners. Neither PTGHS, LLC nor Energizer Brands, LLC is affiliated with the respective owners of their trademarks.

